


MATERIAL/FINISH PROPERTIES

MECHANICAL/ELECTRICAL PROPERTIES

MATERIAL PROPERTIES:
BODY: BRASS PER ASTM B16 OR EQUIVALENT

PLATING PROPERTIES:
BODY: OLIVE DRAB PASSIVATE OVER .000200/.000400 ZINC COBALT OVER .000200/.000400 ELECTROLESS NICKEL

CONNECTOR MEETS: MIL-STD-348 FIG. 311-2, MIL-PRF-39012
ASSEMBLY MEETS: RoHS 2002/95/EC STANDARDS
CONNECTOR DURABILITY: 500 CYCLES MIN.
IMPEDANCE: N/A
FREQUENCY RANGE: N/A
VOLTAGE RATING: 335 VRMS
INSULATION RESISTANCE: 1,000 MEGOHMS

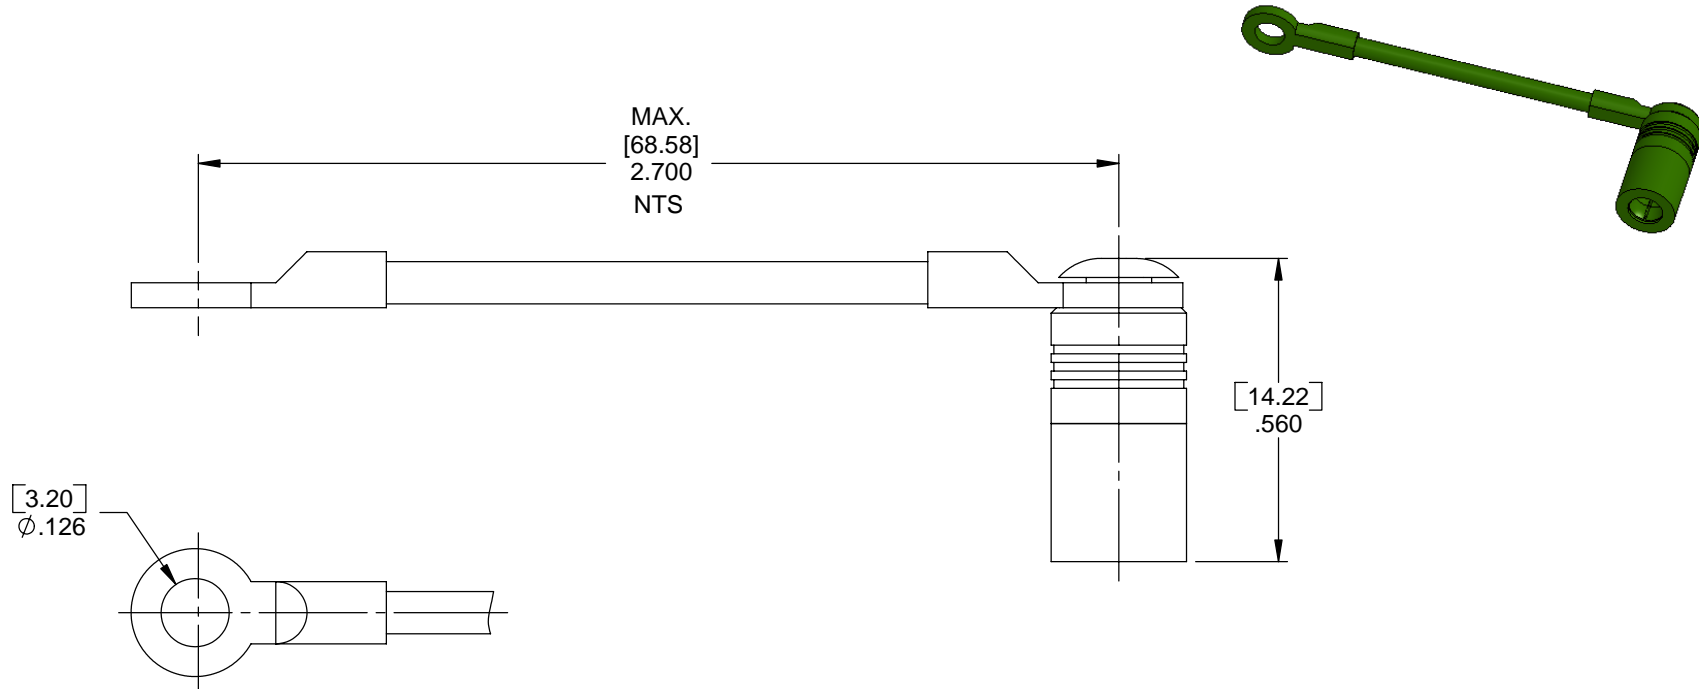

Intelliconnect, Ltd.
A New Type of Connector Company

UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS ARE REFERENCE
X.XXX DIM'S = INCHES * [X.XX] DIM'S = MILLIMETERS
SURFACE FINISH: 63 MICRO MAX.
ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 F.I.M.

TITLE: SMB DUST CAP PLUG WITH CORD

MATERIAL & FINISH: PER TABLE ABOVE

DRAWN BY: SRS	CHECK BY: PCS	APPR. BY: TLB
DATE: 02/13/07	DATE: 02/13/07	DATE: 02/13/07

DO NOT SCALE DRAWING	SCALE 3:1	SIZE A	REV A
-----------------------------	---------------------	------------------	-----------------

SALES DRAWING	PART NO. 0132-P1CH-000-100Z	SHEET 1 OF 1
----------------------	---------------------------------------	------------------------

A	NPR 459	TLB	02/13/07
REV	DESCRIPTION	APPR	DATE