


MATERIAL/FINISH PROPERTIES

MATERIAL PROPERTIES:
 CONTACT: BERYLLIUM COPPER PER ASTM B196 OR EQUIVALENT
 INSULATOR: DELRIN PER ASTM D4181; COLOR: NATURAL

PLATING PROPERTIES:
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

MECHANICAL/ELECTRICAL PROPERTIES

CONNECTOR MEETS: CECC22 220, FIG. 2.1.1
 CONNECTOR MEETS: RoHS 2002/95/EC STANDARDS
 INSULATOR DURABILITY: TBD CYCLES MIN.
 CONTACT DURABILITY: 500 CYCLES MIN.

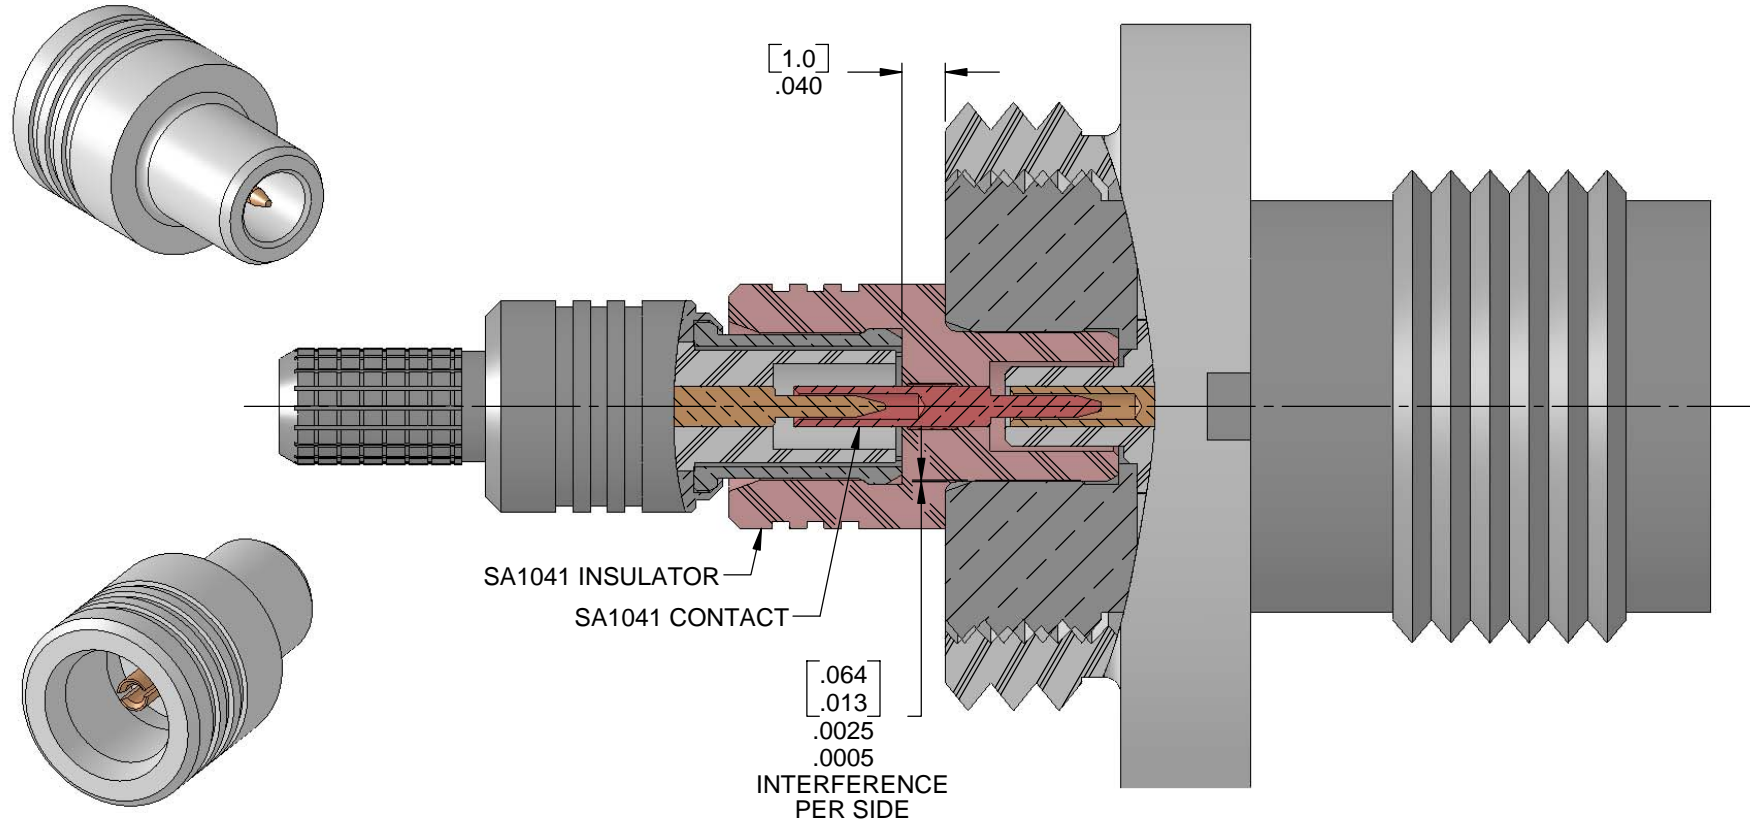

Intelliconnect, Ltd.
A New Type of Connector Company

UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS ARE REFERENCE
 X.XXX DIM'S = INCHES * [X.XX] DIM'S = MILLIMETERS
 SURFACE FINISH: 63 MICRO MAX.
 ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 F.I.M.

TITLE: MCX JACK TO MCX PLUG DELRIN COUPLER

MATERIAL & FINISH: PER TABLE ABOVE

DRAWN BY: SRS	CHECK BY: PCS	APPR. BY: TLB
DATE: 03/31/09	DATE: 03/31/09	DATE: 03/31/09

DO NOT SCALE DRAWING	SCALE 6:1	SIZE A	REV A
-----------------------------	---------------------	------------------	-----------------

SALES DRAWING	PART NO. SA1041G-CONCEPT	SHEET 1 OF 1
----------------------	------------------------------------	------------------------

A	NPR 577E	TLB	04/01/09
REV	DESCRIPTION	APPR	DATE