


MATERIAL/FINISH PROPERTIES

MATERIAL PROPERTIES:
 BODY: BRASS PER ASTM B16 OR EQUIVALENT
 CONTACT: BRASS PER ASTM B16 OR EQUIVALENT
 INSULATOR: PTFE PER ASTM D1710 OR EQUIVALENT

PLATING PROPERTIES:
 BODY: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000130 MIN. NICKEL PER QQ-N-290
 CONTACT: .000080 MIN. GOLD PER MIL-G-45204 OVER
 .000130 MIN. NICKEL PER QQ-N-290

MECHANICAL/ELECTRICAL PROPERTIES

CONNECTOR MEETS: RoHS 2002/95/EC STANDARDS
 CABLE: RAYCHEM 55A 1121-22-2/6-9
 ASSEMBLY INSTRUCTIONS: AI137
 IMPEDANCE: NON CONSTANT
 FREQUENCY RANGE: N/A
 VOLTAGE RATING: 335 VRMS
 INSULATION RESISTANCE: 5,000 MEGOHMS

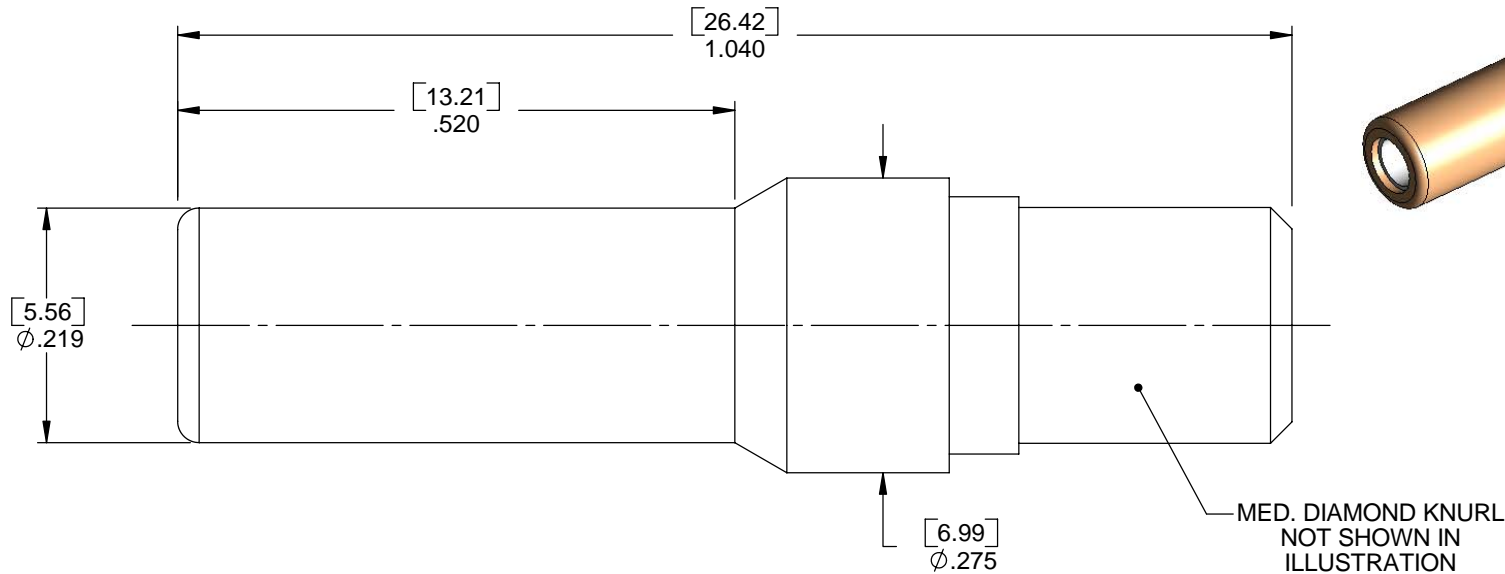

NOTES: 1. CONNECTOR SHOWN ASSEMBLED WITH CABLE.
 2. OUTER CRIMP FERRULE NOT SHOWN.

Intelliconnect, Ltd.
A New Type of Connector Company

UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS ARE REFERENCE
 X.XXX DIM'S = INCHES * [X.XX] DIM'S = MILLIMETERS
 SURFACE FINISH: 63 MICRO MAX.
 ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 F.I.M.

TITLE: SPECIAL MINATURE TRI-AXIAL

MATERIAL & FINISH: PER TABLE ABOVE

DRAWN BY: TLB CHECK BY: PCS APPR. BY: SRS
 DATE: 07/08/03 DATE: 07/08/03 DATE: 07/08/03

DO NOT SCALE DRAWING SCALE 3:1 SIZE A REV 1

SALES DRAWING PART NO. S1015G SHEET 1 OF 1

1	NPR 278	SRS	07/08/03
REV	DESCRIPTION	APPR	DATE