

MATERIAL/FINISH PROPERTIES

MATERIAL PROPERTIES:


BODY: BRASS PER ASTM B16 OR EQUIVALENT
 CONTACT: BERYLLIUM COPPER PER ASTM B196 OR EQUIVALENT
 INSULATOR: PTFE PER ASTM D1710 OR EQUIVALENT
 GASKETS: SILICONE RUBBER PER AA59588 OR EQUIVALENT

PLATING PROPERTIES:

BODY: .000100 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

MECHANICAL/ELECTRICAL PROPERTIES

CONNECTOR MEETS: CECC 22 220, MIL-PRF-39012, MIL-STD-348
 CONNECTOR MEETS: RoHS 2002/95/EC STANDARDS
 CONNECTOR DURABILITY (MCX): 500 CYCLES MIN.
 CONNECTOR DURABILITY (N-TYPE): 500 CYCLES MIN.
 MOUNTING: PER ES117-BK510
 PANEL THICKNESS: .197 [5.0] MAX.
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: DC-6 GHZ
 VOLTAGE RATING: 335 VRMS
 INSULATION RESISTANCE: 1,000 MEGOHMS
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VRMS
 TEMPERATURE RATING: -65°C TO +165°C

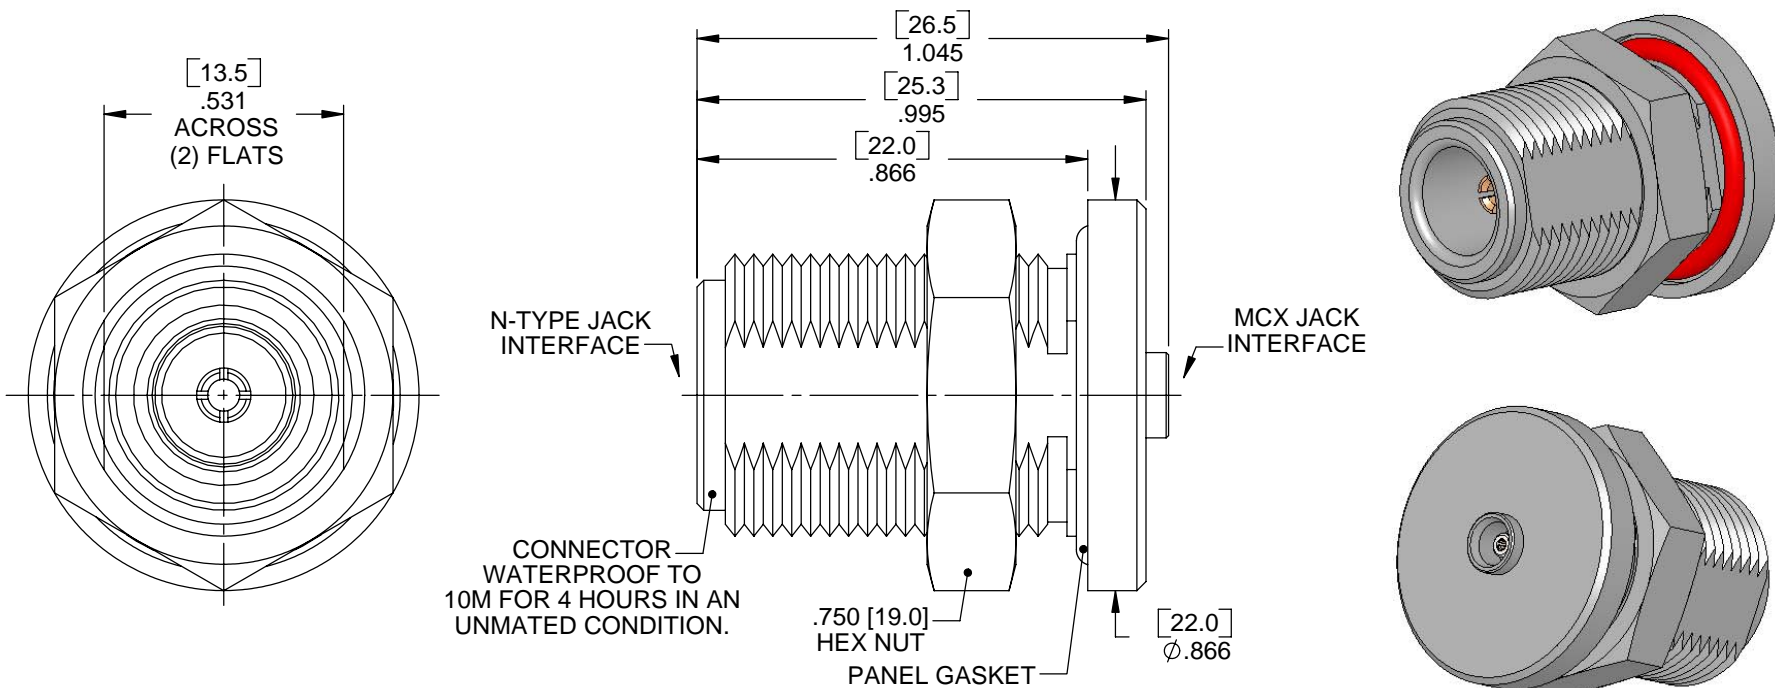

NOTES: 1. LOCKWASHER TO BE SUPPLIED BY CUSTOMER.



TITLE: N-TYPE JACK TO MCX JACK SEALED BULKHEAD MOUNT ADAPTER

MATERIAL & FINISH: PER TABLE ABOVE

DRAWN BY: SRS	CHECK BY: PCS	APPR. BY: TLB
DATE: 06/29/10	DATE: 06/29/10	DATE: 06/29/10

CAGE CODE NO: 5N5S5	SCALE: 2.5:1	SIZE: A	REV: A
----------------------------	---------------------	----------------	---------------

SALES DRAWING	PART NO. A5720-1BK-103N	SHEET 1 OF 1
----------------------	-----------------------------------	------------------------

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE REFERENCE
 X.XXX DIM'S = INCHES * [X.XX] DIM'S = MILLIMETERS
 SURFACE FINISH: 63 MICRO MAX.
 ALL DIAMETERS TO BE CONCENTRIC WITHIN .005 F.I.M.

A	NPR 693E	TLB	07/01/10
REV	DESCRIPTION	APPR	DATE